

Notes:

- Please refer to the installation guide for information on splices, terminations, transitions, and additional details concerning adjacent construction.
- 2.) Minimum and maximum values shown on dimension chart are the limits for proper system performance. Unless otherwise noted, the dimension shown at "A" Mid is the recommended installation joint opening.
- 3.) The system is shipped in nominal standard lengths of 6.5ft (2 meters).
- 4.) Double-sided configuration shown for reference only. Product available in one-sided, uncoated or Pick Resistant options as well. Contact your WBA Sales Representative for more information.
- 5.) Available in gray color only.
- 6.) Depth may vary (2", 3" or 4" deep) depending on UL Listing.



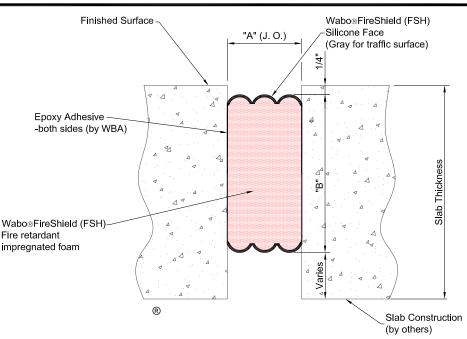



Wabo FireShield (FSH 25% Only) Detail

Slab to Slab Condition
NOT TO SCALE

| Size whe | n ordering | | | | | | | | | 1101100 | O/ (LL | | |
|----------------------|------------|-------------------|----|------|-----|------------|----|------------------|-----|---|---------------------------|-----------------|---------------------------|
| @ Mean T | emperature | | | | | | | | | Part Number for Ordering (25% mvmt) | | | |
| "A" @ Mid. | | Joint Opening "A" | | | | | | | | 2hr Rated @ 25% mvnt 3hr Rated @ 25% mvnt 2hr Rated @ 25% mvnt 3hr Rated @ 25% mvnt | | | |
| Nominal Install J.O. | | Min. | | Max. | | Total Mov. | | System Depth "B" | | Coated Both Sides | Coated Both Side | Coated One Side | Coated One Side |
| in | mm | in | mm | in | mm | in | mm | in | mm | | | | |
| 0.50 | 13 | 0.38 | 10 | 0.63 | 16 | 0.25 | 6 | 4.00 | 102 | FSH 60000 | FSH 60209 | FSH 60404 | FSH 60227 |
| 1.00 | 25 | 0.75 | 19 | 1.25 | 32 | 0.50 | 13 | 4.00 | 102 | FSH 60003 | FSH 60215 | FSH 60407 | FSH 60234 |
| 1.50 | 40 | 1.13 | 29 | 1.88 | 48 | 0.75 | 19 | 4.00 | 102 | FSH 60005 | FSH 60219 | FSH 60409 | FSH 60238 |
| 2.00 | 50 | 1.50 | 38 | 2.50 | 64 | 1.00 | 25 | 4.00 | 102 | FSH 60007 | FSH 60222 | FSH 60411 | FSH 60241 |
| 2.50 | 65 | 1.88 | 48 | 3.13 | 80 | 1.25 | 32 | 4.00 | 102 | FSH 60009 | FSH 60224 | FSH 60413 | FSH 60243 |
| 3.00 | 76 | 2.25 | 57 | 3.75 | 95 | 1.50 | 38 | 4.00 | 102 | FSH 60011 | FSH 60226 | FSH 60415 | FSH 60245 |
| 4.00 | 102 | 3.00 | 76 | 5.00 | 127 | 2.00 | 51 | 4.00 | 102 | FSH 60015 | (not avail, in 4" size) | FSH 60419 | (not avail, in 4" size) |
| 4.50 | 114 | 3.38 | 86 | 5.63 | 143 | 2.25 | 57 | 4.00 | 102 | FSH 60017 | (not avail, in 4.5" size) | FSH 60421 | (not avail, in 4.5" size) |

Other intermediate sizes are available up to 4.5" wide, contact WBA for details. Contact your WBA Representative with your special design needs.

PROJECT NAME:

PROJECT LOCATION:

DRAWING DESCRIPTION

WaboFireShield (Horiz 25% Mvnt)

■ **BASF**We create chemistry

Watson Bowman Acme Corp. 95 Pineview Drive Amherst, NY 14228 phone: (716) 691-7566 fax: (716) 691-9239 www.wbacorp.com Watson Bowman Acme

laus

SHEET NO:

REVISION NO:

DRAWING NO:

A-29888

DATE: 09/29/2016 MODEL: FSH

Information provided herein, including but not limited to, any drawing, design, photograph, graphic, or statement(s) ("Materials") are proprietary and the property of Watson Bowman Acme Corporation ("Company"). Reproduction, translation, or reduction to any electronic medium or machine readable form, in whole or part, is strictly prohibited, except for the express purpose for which It has been furnished without prior written consent of Company. All Materials contained herein are provided by Company for information purposes only. Company reserves the right to amend or withdraw any information contained in the Materials without notice. All technical or other advice by Company, whether verbal or written, concerning products, or the use of products in specific situations ("Advice") is given by Company and is used at the Users own risk.